

ena  
truck

 **Skyled**



[WWW.ENATRUCK.LT](http://WWW.ENATRUCK.LT)






**PAPILDOMAS LED ŽIBINTAS SKYLED JUMBO AMBER FULL LED 10" SU PERJUNGIAMU BALTOS/ORANŽINĖS SPALVOS GABARITU**

**SKYLED JUMBO AMBER: JE320.60**

**69,00Eur+PVM**

|                         |                              |
|-------------------------|------------------------------|
| Typ of lamp             | FULL LED                     |
| Power of light          | 10000 lmn, 8500 lmn (actual) |
| 1 LUX @ m               | 850m (0,25 lux)              |
| IP-class                | IP68/69K                     |
| Position light          | White and Orange             |
| Voltage (V DC)          | 9-36V                        |
| LED power               | 100W                         |
| Weight                  | 1,8 kg                       |
| Width                   | 247 mm                       |
| Depth                   | 92 mm                        |
| Height with bracket     | 176 mm                       |
| According to regulation | ECE R112, R7, R10            |
| Material housing/chassi | Aluminium                    |
| Material lens           | Polycarbonate                |

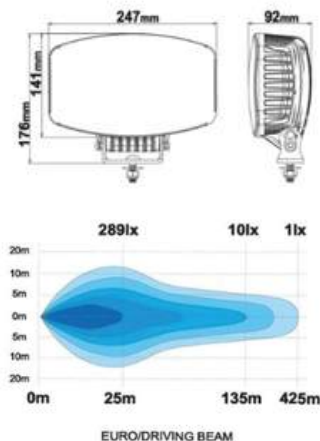




**PAPILDOMAS ŽIBINTAS JUMBO OCULUS FULL LED 10 SPOTLIGHT (90W, SU PERJUNGIAMU BALTOS/ORANŽINĖS SPALVOS GABARITU )**

**SKYLED JUMBO OCULUS: JE320.50**

**72,00Eur+PVM**

|                         |                               |
|-------------------------|-------------------------------|
| Type of lamp            | FULL LED                      |
| Power of light          | 10000 lmn, 8500 lmn (actual)  |
| 1 LUX @ m               | 420m (1 lux)                  |
| IP-class                | IP68/69K                      |
| Position light          | White and Orange              |
| Voltage (V DC)          | 9-36V                         |
| LED power               | 90W                           |
| Amp (12/24V)            | 5,7A/2,7A                     |
| Weight                  | 2,1 kg                        |
| Width                   | 247 mm                        |
| Depth                   | 92 mm                         |
| Height with bracket     | 176 mm                        |
| According to regulation | ECE R112 (ref. 37,5), R7, R10 |
| Material housing/chassi | Aluminium                     |
| Material lens           | Polycarbonate                 |

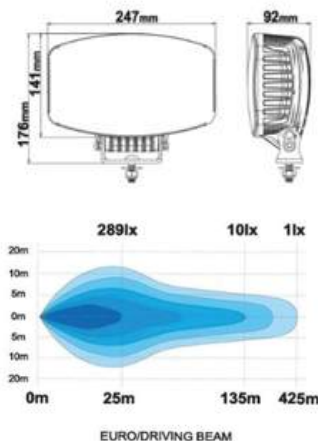




**PAPILDOMI ŽIBINTAI SKYLED JUMBO DRACO DRL 80W FULL LED SU PERJUNGIAMA BALTOS/ORANŽINĖS SPALVOS DIENOS ŠVIĖSOS FUNKCIJA**

**SKYLED JUMBO DRACO DRL: JE320.70**

**65,00Eur+PVM**

|                          |                               |
|--------------------------|-------------------------------|
| Typ of lamp              | FULL LED                      |
| Power of light           | 10000 lmn, 8500 lmn (actual)  |
| 1 LUX @ m                | 420m (1 lux)                  |
| IP-class                 | IP68/69K                      |
| Position light           | White and Orange              |
| Voltage (V DC)           | 9-36V                         |
| LED power                | 90W                           |
| Amp (12/24V)             | 5,7A/2,7A                     |
| Weight                   | 2,1 kg                        |
| Width                    | 247 mm                        |
| Depth                    | 92 mm                         |
| Height with bracket      | 176 mm                        |
| According to regulation  | ECE R112 (ref. 37,5), R7, R10 |
| Material housing/chassis | Aluminium                     |
| Material lens            | Polycarbonate                 |

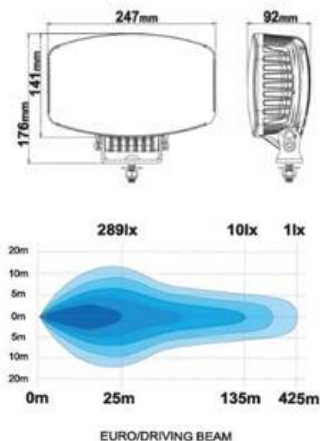





**PAPILDOMAS ŽIBINTAS JUPITER 9XSU PERJUNGIAMU BALTOS/ORANŽINĖS SPALVOS GABARITU**

**SKYLED JUPITER 9X: 13300011+**

**69,00Eur+PVM**

|                            |                                                                     |
|----------------------------|---------------------------------------------------------------------|
| Typ of lamp                | FULL LED                                                            |
| Position light             | White and Orange                                                    |
| Power of light             | OFFROAD 13000 Lm, 10500Lm (actual)<br>ECE 4200 Lm, 3500 Lm (actual) |
| 1 LUX @ m                  | 1lux (659m) OFFROAD<br>1lux (407m) ECE                              |
| Voltage (V-DC)             | 9-36V                                                               |
| LED                        | 10W LED x 12 szt                                                    |
| Amp (12/24V)               | 9,8A/4,6A OFFROAD<br>3,2A/1,6A ECE                                  |
| Color Temperature IP-class | 5000K<br>IP68,IP69K                                                 |
| Width                      | 218 mm                                                              |
| Depth                      | 70 mm                                                               |
| Height with bracket        | 233,5 mm                                                            |
| According to lamp          | ECE R7 R10 R112 CE RoHS (ref. No 37,5)                              |
| Material housing/chassi    | Aluminium                                                           |
| Material lens              | Polycarbonate                                                       |

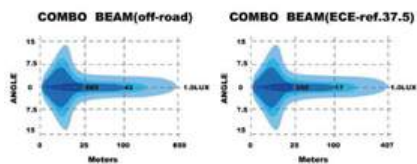




**DRIVING LIGHT SKYLED COSMO 9X WITH WHITE/ORANGE POSITION LIGHT**  
PN. 13300022

**77,00Eur+PVM**

**SKYLED COSMO 9X: 13300022**

|                          |                                 |
|--------------------------|---------------------------------|
| Typ of lamp              | FULL LED                        |
| Power of light           | 12000 lmn, 10200 lmn (actual)   |
| 1 LUX @ m                | 469m (1 lux)                    |
| IP-class                 | IP68/69K                        |
| Position light           | White and Orange                |
| Voltage (V DC)           | 9-36V                           |
| LED power                | 120W                            |
| Weight                   | 1,8 kg                          |
| Width                    | 218 mm                          |
| Depth                    | 84 mm                           |
| Height with bracket      | 233 mm                          |
| According to regulation  | CE, ECE R112 (Ref. 45), R10, R7 |
| Material housing/chassis | Aluminium                       |
| Material lens            | Polycarbonate                   |

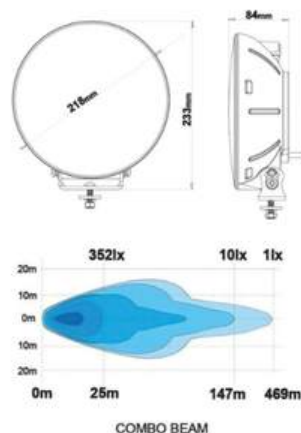




**PAPILDOMAS ŽIBINTAS SKYLED DORADO 9X SU PAPILDOMU BALTOŠ/ORANŽINĖS SPALVOS GABARITU IR + SIGNALINIŲ ŠVYTURĖLIŲ**


**SKYLED DORADO 9X: 13300033**

**79,00Eur+PVM**

|                         |                                 |
|-------------------------|---------------------------------|
| Type of lamp            | FULL LED                        |
| Power of light          | 12500 lmn, 10600 lmn (actual)   |
| 1 LUX @ m               | 472m (1 lux)                    |
| IP-class                | IP68/69K                        |
| Position light          | White and Orange                |
| Warning light           | Orange                          |
| Voltage (V DC)          | 9-36V                           |
| LED power               | 130W                            |
| Width                   | 216 mm                          |
| Depth                   | 74,4 mm                         |
| Height with bracket     | 230 mm                          |
| According to regulation | CE /ECE R148 / R149 / R65 / R10 |
| Material housing/chassi | Aluminium                       |
| Material lens           | Polycarbonate                   |

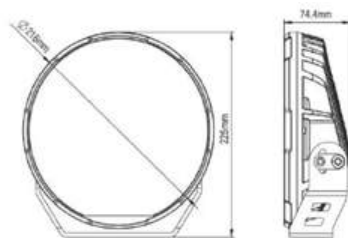

**DRIVING BEAM**

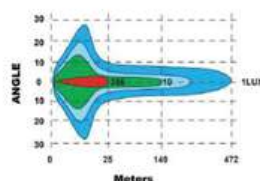





**PAPILDOMAS ŽIBINTAS CRUX 9X SU BALTOS/ORANŽINĖS SPALVOS PERJUNGIAMU DINAMINIŲ GABARITŲ**

**77,00Eur+PVM**

**SKYLED CRUX 9X: 13300044**

|                            |                                                  |
|----------------------------|--------------------------------------------------|
| Typ of lamp                | FULL LED                                         |
| Posiŝn light (Dynamic)     | White and Orange (Dynamic)                       |
| Typ of Beam                | Driving Beam                                     |
| Power of light             | OFFROAD 11000 Lm, 5700Lm<br>ECE 4100 Lm, 3400 Lm |
| 1 LUX @ m                  | 1lux (575m) OFFROAD<br>1lux (480m) ECE           |
| Voltage (V-DC)             | 10-32V                                           |
| LED                        | 40W LED x 2+20W LED x 2                          |
| Amp (12/24V)               | 8,96 A/4,48 A OFFROAD<br>1,84 A/0,92 A ECE       |
| Color Temperature IP-class | 5700K<br>IP68,IP69K                              |
| According to laRegu        | ECE R10 R148 R149 (ref. No 20)                   |
| Width                      | 220 mm                                           |
| Depth                      | 80 mm                                            |
| Height with bracket        | 236 mm                                           |
| Material housing/chassi    | Aluminium                                        |
| Material lens              | Polycarbonate                                    |

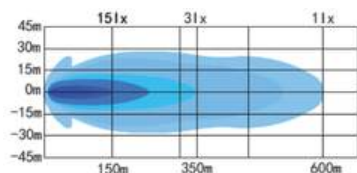




# Jupiter 7X

**pAPILDOMAS ŽIBINTAS SKYLED JUPITER 7X SU PERJUNGIAMU BALTOS/ORANŽINĖS SPALVOS GABARITU**


**71,00Eur+PVM**

**SKYLED JUPITER 7X: 133000117**

|                         |                                      |
|-------------------------|--------------------------------------|
| Typ of lamp             | FULL LED                             |
| Position light          | White and Orange                     |
| Power of light          | ECE 5400 Lm, 4590 Lm (actual)        |
| 1 LUX @ m               | 1lux (380 m) ECE                     |
| Voltage (V DC)          | 9-36V                                |
| LED                     | 5W LED x 12 szt                      |
| Amp (12/24V)            | 4,2A/2A ECE                          |
| Color Temperature       | 6500K                                |
| IP-class                | IP68,IP69K                           |
| Width                   | 180 mm                               |
| Depth                   | 65 mm                                |
| Height with bracket     | 191,5 mm                             |
| According to Regulation | ECE R7 R10 R112 CE RoHS (ref. No 30) |
| Material housing/chassi | Aluminium                            |
| Material lens           | Polycarbonate                        |



**EURO BEAM**

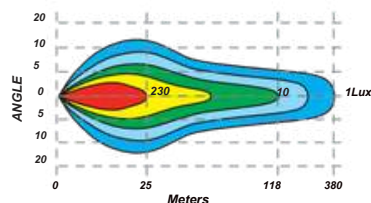





## Cosmo 7X

**pAPILDOMAS ŽIBINTAS SKYLED COSMO 7X SU PERJUNGIAMU BALTOS/ORANŽINĖS SPALVOS GABARITU**

**69,00Eur+PVM**

**SKYLED COSMO 7X: 133000227**

|                          |                                        |
|--------------------------|----------------------------------------|
| Typ of lamp              | FULL LED                               |
| Posign light             | White and Orange                       |
| Power of light           | ECE 6000 Lm, 4800 Lm (actual)          |
| 1 LUX @ m                | 1lux (406 m) ECE                       |
| Voltage (V DC)           | 9-36V                                  |
| LED                      | 5W LED x 12 szt                        |
| Amp (12/24V)             | 4,A/2A ECE                             |
| Color Temperature        | 5700K                                  |
| IP-class                 | IP68,IP69K                             |
| Width                    | 180 mm                                 |
| Depth                    | 67,5 mm                                |
| Height with bracket      | 190 mm                                 |
| According to Regulation  | ECE R7 R10 R112 CE RoHS (ref. No 37,5) |
| Material housing/chassis | Aluminium                              |
| Material lens            | Polycarbonate                          |

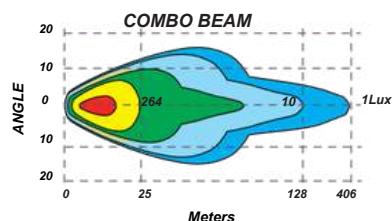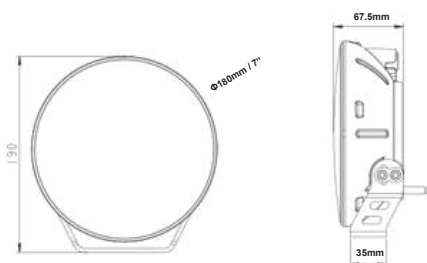





**PAPILDOMI ŽIBINTAI SKYLED CRUX 7X SU PAPILDOMA DINAMINE BALTA/ORANŽINE DIENOS ŠVIESA 00447**

**SKYLED CRUX 7X: 133000447**

**73,00Eur+PVM**

|                          |                                                                       |
|--------------------------|-----------------------------------------------------------------------|
| Type of lamp             | FULL LED                                                              |
| Position light (Dynamic) | White and Orange (Dynamic)                                            |
| Type of Beam             | Driving Beam                                                          |
| Power of light           | OFFROAD 7333 Lm, 4031 Lm<br>ECE 1132 Lm, 792 Lm                       |
| 1 LUX @ m                | 1lux (465m) OFFROAD<br>1lux (210m) ECE                                |
| Voltage (V DC)           | 10-32V                                                                |
| LED                      | 20W LED x 2+10W LED x 2<br>6,76 A/3,38 A OFFROAD<br>1,04 A/0,52 A ECE |
| Amp (12/24V)             | 5700K                                                                 |
| Color Temperature        | IP68, IP69K                                                           |
| IP-class                 | ECE R10 R148 R149 (ref. No 17,5)                                      |
| According to laRegu      | 170 mm                                                                |
| Width                    | 75 mm                                                                 |
| Depth                    | 185 mm                                                                |
| Height with bracket      | Aluminium                                                             |
| Material housing/chassi  | Polycarbonate                                                         |
| Material lens            |                                                                       |

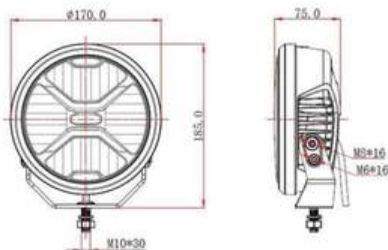

**DYNAMIC  
DUAL POSITION  
LIGHTS**





**Universalus darbinis LED žibintas SKYLED VELA FULL LED (9-36V) su anti-icing sistema**

**SKYLED VELA: 13301501**

**89,00Eur+PVM**


SKYLED VELA darbinis žibintas turi kryptinį modulį, kurį galima montuoti kairėje, dešinėje arba viršutinėje žibinto dalyje. Dėl to produktas yra universalus ir gali būti montuojamas abiejose transporto priemonės pusėse.

Vela taip pat turi universalų tvirtinimo laikiklį, leidžiantį jį montuoti tiek iš apačios, tiek iš šono.

SKYLED VELA modelis aprūpintas SNOW-MELT ir ANTI-ICING SYSTEM technologija – tai speciali žibinto lęšio šildymo funkcija, apsauganti nuo apledėjimo ir sniego kaupimosi. Įjungus maitinimą, žibinto lęšis įkaista iki aukštos temperatūros, todėl pašalina ledą ir sniegą. Pasibaigus šildymo ciklui, sistema grįžta į įprastą veikimo režimą ir šildymas išjungiamas.

PASTABA: dėl aukštos temperatūros eksploatacijos metu liesti žibinto lęšį draudžiama.

|                         |                                        |
|-------------------------|----------------------------------------|
| Typ of lamp             | Plow lamp                              |
| Functions               | Low and High beam/position/directional |
| Additional              | Anti-icing system                      |
| Power of high beam      | 3600 lmn, 2900 lmn (actual)            |
| 1 LUX @ m               | 280m (1 lux)                           |
| Power of low beam       | 1800 lmn, 1500 lmn (actual)            |
| 1 LUX @ m               | 163m (1 lux)                           |
| IP-class                | IP68/69K                               |
| Position Lights         | White                                  |
| Directional             | Orange                                 |
| Voltage (V DC)          | 9-36V                                  |
| Width                   | 215 mm                                 |
| Depth                   | 85 mm                                  |
| Height without bracket  | 176 mm                                 |
| According to regulation | ECE R112/R7/R6 , R10, DOT, CE, RoHS    |
| Material housing/chassi | Aluminium                              |

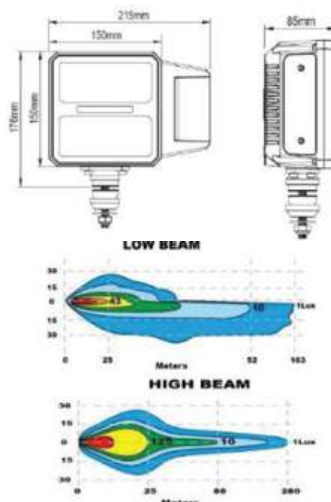






**PAPILDOMAS LED ŽIBINTAS SKYLED GEMINI PRO 20" (516 MM) SU PERJUNGIAMA BALTA/GELTONA GABARITINE JUOSTA**  
**P N. 130.20LB+**

**68,00Eur+PVM**

**LED BAR SKYLED GEMINI PRO 20" : 130.20LB+**

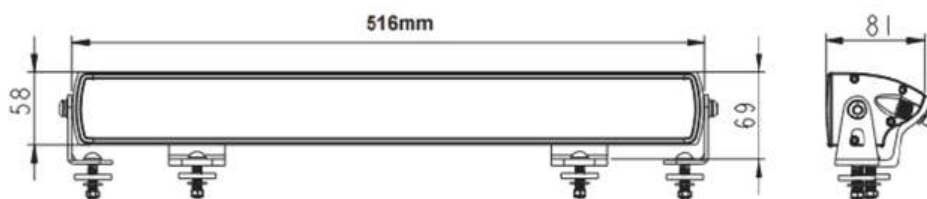

|                          |                                                       |
|--------------------------|-------------------------------------------------------|
| Typ of lamp              | LED BAR                                               |
| Power of light           | 14000 lmn, 12000 lmn (efcve)                          |
| 1 LUX @ m                | 588m (1 lux) OFFROAD<br>470m (1 lux) APPROVAL         |
| IP-class                 | IP68/69K                                              |
| Position Lights          | White and Orange                                      |
| Warning Light            | Orange                                                |
| Voltage (V DC)           | 9-36V                                                 |
| LED power                | Driving Light 10LED x 15W<br>Position Light 2LED x 1W |
| Width                    | 516 mm                                                |
| Depth                    | 81 mm                                                 |
| Height with bracket      | 69 mm                                                 |
| According to regulation  | ECF R112/R7/ R10, CE, Ref No 50, CE, ROHS             |
| Material housing/chassis | Aluminium                                             |
| Material lens            | Polycarbonate                                         |







**PAPILDOMAS LED ŽIBINTAS GEMINI 20" FLASH (514 MM)  
SU BALTOMIS IR ORANŽINĖMIS POZICINĖMIS ŠVIESOMIS BEI  
ĮSPĖJAMAJA (MIRKSINČIA) FUNKCIJA**

**89,00Eur+PVM**

**LED BAR SKYLED GEMINI FLASH 20": 130.20LBF**

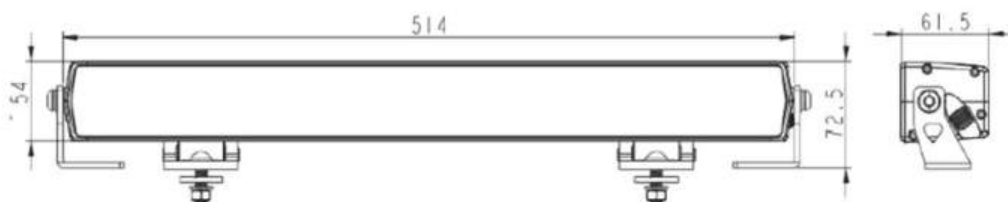

|                         |                                           |
|-------------------------|-------------------------------------------|
| Typ of lamp             | LED BAR                                   |
| Power of light          | 11000 lmn, 8500 lmn (actual)              |
| 1 LUX @ m               | 465m (1 lux)                              |
| IP-class                | IP68/69K                                  |
| Position Lights         | White and Orange                          |
| Warning Light           | Orange                                    |
| Voltage (V DC)          | 9-36V                                     |
| LED power               | Driving Light 10LED x 12W                 |
|                         | Position Light 2LED x 2W                  |
|                         | Warning Light 5LED x 3W                   |
| Width                   | 514 mm                                    |
| Depth                   | 61,5 mm                                   |
| Height with bracket     | 72,5 mm                                   |
| According to latvian    | ECE (ref.50) R10, R112, R65, R7, CE, ROHS |
| Material housing/chassi | Aluminium                                 |
| Material lens           | Polycarbonate                             |

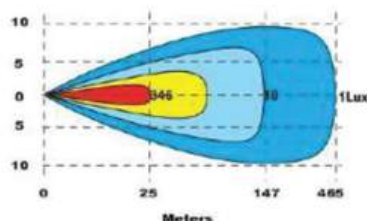





PAPILDOMAS LED ŽIBINTAS SKYLED FORNAX 31" LENKTAS (813 MM) SU BALTA/ORANŽINE GABARITINE ŠVIESA

**88,00Eur+PVM**

LED BAR SKYLED FORNAX CURVED 31": 130.31LBC

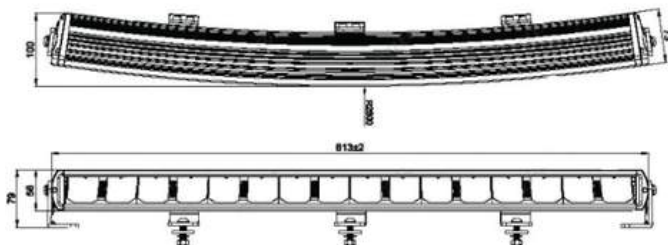

|                         |                               |
|-------------------------|-------------------------------|
| Typ of lamp             | LED BAR (CURVED)              |
| Power of light          | 15200 lmn (raw)               |
| 1 LUX @ m               | 480m (1 lux)                  |
| IP-class                | IP68/69K                      |
| Position Lights         | White and Orange              |
| Voltage (V DC)          | 9-36V                         |
| LED power               | 160W                          |
| Width                   | 813 mm                        |
| Depth                   | 100 mm                        |
| Height with bracket     | 79 mm                         |
| According to label      | ECE R112, R10, R7 / CE / RoHS |
| Material housing/chassi | Aluminium                     |
| Material lens           | Polycarbonate                 |

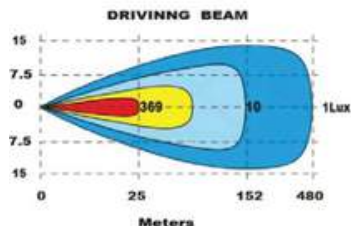





**PAPILDOMAS LED ŽIBINTAS SKYLED FORNAX 43" LENKTAS (1100 MM) SU BALTA/ORANŽINE GABARITINE ŠVIESA**

**91,00Eur+PVM**

**LED BAR SKYLED FRONAX CURVED 43": 130.43LBC**

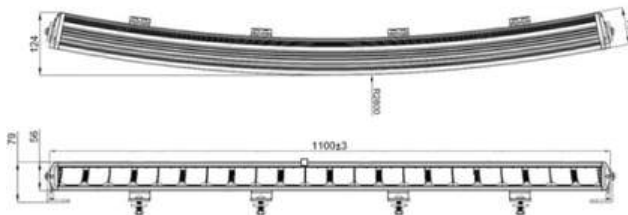

|                          |                               |
|--------------------------|-------------------------------|
| Typ of lamp              | LED BAR (CURVED)              |
| Power of light           | 20900 lmn (raw)               |
| 1 LUX @ m                | 512m (1 lux)                  |
| IP-class                 | IP68/69K                      |
| Position Lights          | White and Orange              |
| Voltage (V DC)           | 9-36V                         |
| LED power                | 220W                          |
| Width                    | 1100 mm                       |
| Depth                    | 100 mm                        |
| Height with bracket      | 79 mm                         |
| According to regulation  | ECE R112, R10, R7 / CE / RoHS |
| Material housing/chassis | Aluminium                     |
| Material lens            | Polycarbonate                 |

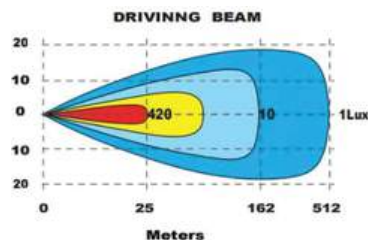





**PAPILDOMAS LED ŽIBINTAS SKYLED APUS SUPER SLIM 20" (515 MM) SU BALTA/ORANŽINE GABARITINE ŠVIESA**

**69,00Eur+PVM**

**LED BAR SKYLED APUS SUPER SLIM 20": 130.20LBS**

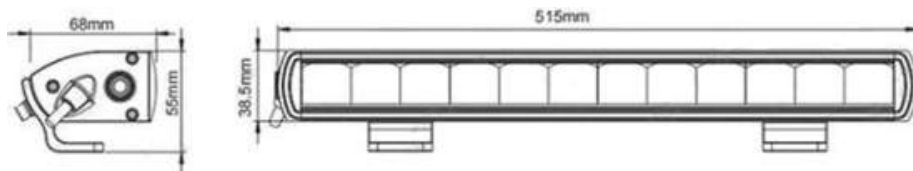

|                          |                           |
|--------------------------|---------------------------|
| Typ of lamp              | LED BAR SUPER SLIM        |
| Power of light           | 8100 lmn (raw)            |
| 1 LUX @ m                | 458m (1 lux)              |
| IP-class                 | IP68/69K                  |
| Position Lights          | White and Orange          |
| Voltage (V DC)           | 9-36V                     |
| LED power                | 90W                       |
| Width                    | 515 mm                    |
| Depth                    | 68 mm                     |
| Height with bracket      | 55 mm                     |
| According to regulation  | ECE R112, R10 / CE / RoHS |
| Material housing/chassis | Aluminium                 |
| Material lens            | Polycarbonate             |







PAPILDOMAS LED ŽIBINTAS SKYLED APUS SUPER SLIM 30" (758 MM) SU BALTA/ORANŽINE GABARITINE ŠVIESA

**79,00Eur+PVM**

LED BAR SKYLED APUS SUPER SLIM 30": 130.30LBS

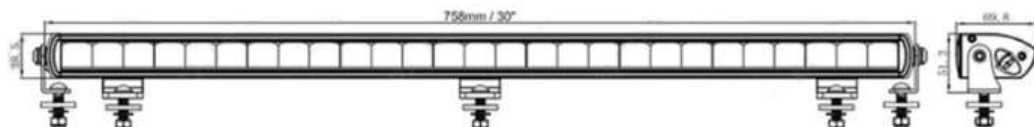


|                          |                           |
|--------------------------|---------------------------|
| Typ of lamp              | LED BAR SUPER SLIM        |
| Power of light           | 12200 lmn (raw)           |
| 1 LUX @ m                | 491m (1 lux)              |
| IP-class                 | IP68/69K                  |
| Position Lights          | White and Orange          |
| Voltage (V DC)           | 9-36V                     |
| LED power                | 135W                      |
| Width                    | 758 mm                    |
| Depth                    | 69,8 mm                   |
| Height with bracket      | 51,3 mm                   |
| According to regulation  | ECE R112, R10 / CE / RoHS |
| Material housing/chassis | Aluminium                 |
| Material lens            | Polycarbonate             |

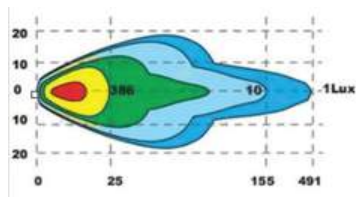




## PAPILDOMAS LED ŽIBINTAS SKYLED APUS 40'' (1003 mm) LENKTAS, SUPER SLIM

**LED BAR SKYLED APUS SUPER SLIM 40'': 130.40LBCS**

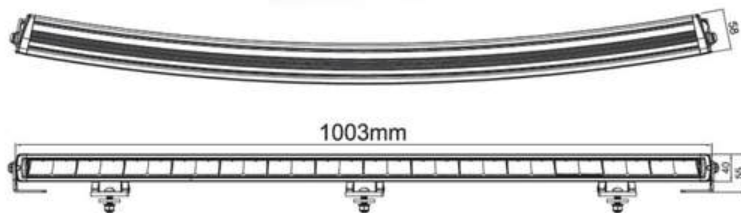




|                         |                                          |
|-------------------------|------------------------------------------|
| Type of lamp            | LED BAR (curved)                         |
| Power of light          | ECE 17500 Lm, 14800Lm                    |
| 1 LUX @ m               | 456m (1 lux) ECE                         |
| IPclass                 | IP68                                     |
| Position light          | -                                        |
| Voltage (V DC)          | 936V                                     |
| LED power               | 28 LED x 7W                              |
| Width                   | 1003 mm                                  |
| Depth                   | 58 mm                                    |
| Height                  | 40,5 mm                                  |
| Height with bracket     | 55,5 mm                                  |
| According to regulation | ECE R112/ R10, CE, Ref. No. 45, CE, ROHS |
| Material housing/chassi | Aluminium                                |
| Material lens           | Polycarbonate                            |

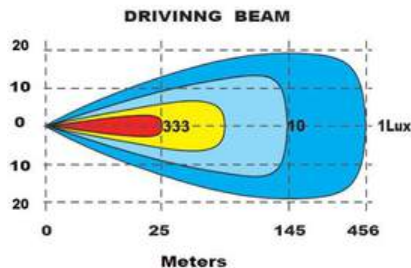




**PAPILDOMAS LED ŽIBINTAS SLIDE 11,2 (283 MM) SU BALTA/ORANŽINE DINAMINĖ DIENOS ŠVIESA**

**LED BAR SKYLED SLIDE 11,2": 130.112LBD**

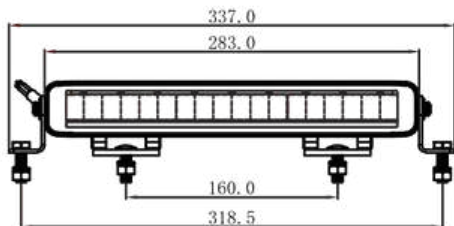

|                          |                                 |
|--------------------------|---------------------------------|
| Typ of lamp              | LED BAR                         |
| Power of light           | ECE 3780 Lm, 3375Lm             |
| 1 LUX @ m                | 325m (1 lux) ECE                |
| IP-class                 | IP67, IP69K                     |
| Position light (Dynamic) | White and Orange (Dynamic) 10-  |
| Voltage (V DC)           | 32V                             |
| Color Temperature        | 5700K                           |
| LED                      | 9 LED x 5W                      |
| Width                    | 283 mm                          |
| Depth                    | 58 mm                           |
| Height                   | 56 mm                           |
| According to Regulation  | ECE R10, R148, R149, Ref. No 30 |
| Material                 | Aluminium                       |
| housing/chassis Material | Polycarbonate                   |
| lens                     |                                 |



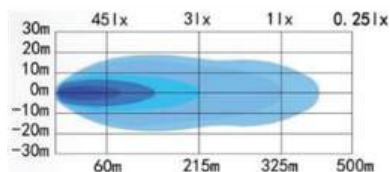





## PAPILDOMAS LED ŽIBINTAS 14,5 LED BAR (367 MM) SU BALTA/ORANŽINE DINAMINE DIENOS ŠVIESA

P N. 130.145LBD

**LED BAR SKYLED SLIDE 14,5": 130.145LBD**

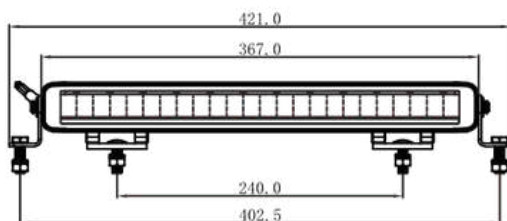



|                         |                            |
|-------------------------|----------------------------|
| Typ of lamp             | LED BAR                    |
| Power of light          | ECE 5040 Lm, 4500Lm        |
| 1 LUX @ m               | 360m (1 lux) ECE           |
| IP-class                | IP67, IP69K                |
| Posign light (Dynamic)  | White and Orange (Dynamic) |
| Voltage (V DC)          | 10-32V                     |
| Color Temperature       | 5700K                      |
| LED                     | 12 LED x 5W                |
| Width                   | 367 mm                     |
| Depth                   | 58 mm                      |
| Height                  | 56 mm                      |
| According to Regulation | ECE R10, R148 Ref. No 30   |
| Material                | Aluminium                  |
| housing/chassis         | Material                   |
| lens                    | Polycarbonate              |

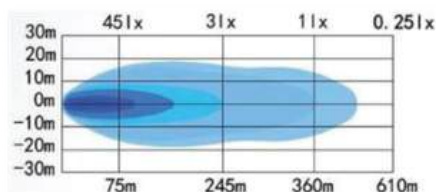




## PAPILDOMAS LED ŽIBINTAS SLIDE 21,1 LED BAR (534 MM) SU BALTA/ORANŽINE DINAMINE DIENOS ŠVIESA

### LED BAR SKYLED SLIDE 21,1": 130.211LBD

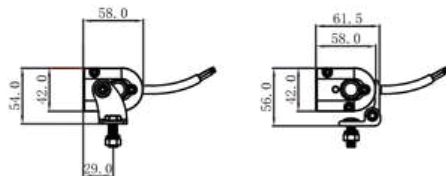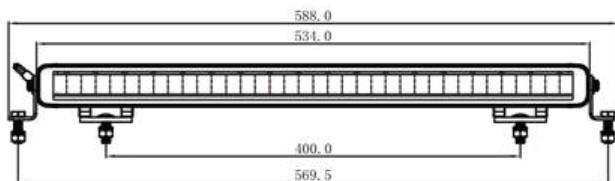

|                          |                            |
|--------------------------|----------------------------|
| Typ of lamp              | LED BAR                    |
| Power of light           | ECE 7560 Lm, 6753Lm        |
| 1 LUX @ m                | 450m (1 lux) ECE           |
| IP-class                 | IP67, IP69K                |
| Position light (Dynamic) | White and Orange (Dynamic) |
| Voltage (V DC)           | 10-32V                     |
| Color Temperature        | 5700K                      |
| LED                      | 18 LED x 5W                |
| Width                    | 534 mm                     |
| Depth                    | 58 mm                      |
| Height                   | 56 mm                      |
| According to Regulation  | ECE R10, R148 Ref. No 37,5 |
| Material                 | Aluminium                  |
| housing/chassis          | Polycarbonate              |
| lens                     |                            |

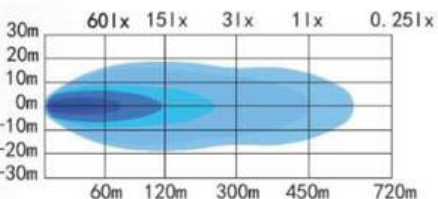





PAPILDOMAS LED ŽIBINTAS SKYLED SLIDE 31 LED BAR (786,5 MM) SU BALTA/ORANŽINE DINAMINE DIENOS ŠVIESA

**89,00Eur+PVM**

LED BAR SKYLED SLIDE 31": 130.310LBD

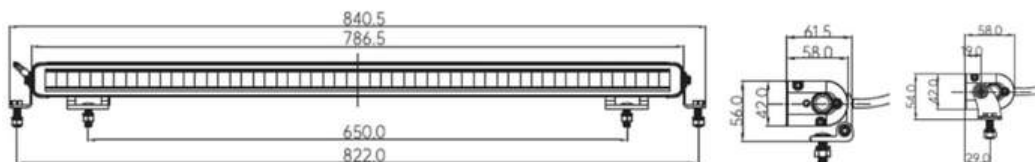

|                         |                                |
|-------------------------|--------------------------------|
| Type of lamp            | LED BAR                        |
| Power of light          | ECE 11340 Lm, 10125 Lm         |
| 1 LUX @ m               | 550m (1 lux) ECE               |
| IP-class                | IP67, IP69K                    |
| Posign light (Dynamic)  | White and Orange (Dynamic)     |
| Voltage (V DC)          | 10-32V                         |
| Color Temperature       | 5700K                          |
| LED                     | 27 LED x 5W                    |
| Width                   | 786,5 mm                       |
| Depth                   | 58 mm                          |
| Height                  | 56 mm                          |
| According to Regulation | ECE R10, R148, R149 Ref. No 45 |
| Material                | Aluminium                      |
| housing/chassi Material | Polycarbonate                  |
| lens                    |                                |


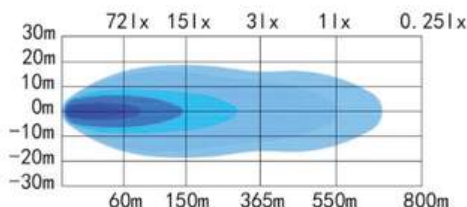





**PAPILDOMAS LED ŽIBINTAS SKYLED TOWER 21,2 LED BAR (537 MM) SU BALTA/ORANŽINE DINAMINE DIENOS ŠVIESA**

**LED BAR SKYLED TOWER 21,2": 130.212LBD**

**89,00Eur+PVM**

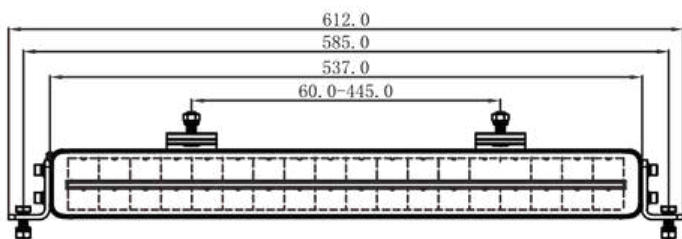

|                          |                            |
|--------------------------|----------------------------|
| Typ of lamp              | LED BAR                    |
| Power of light           | ECE 15120 Lm, 13500Lm      |
| 1 LUX @ m                | 635m (1 lux) ECE           |
| IP-class                 | IP67, IP69K                |
| Position light (Dynamic) | White and Orange (Dynamic) |
| Voltage (V DC)           | 10-32V                     |
| Color Temperature        | 5700K                      |
| LED                      | 36 LED x 5W                |
| Width                    | 537 mm                     |
| Depth                    | 70,1 mm                    |
| Height                   | 63,8 mm                    |
| According to Regulation  | ECE R10, R112, Ref. No 40, |
| housing/chassi Material  | Aluminium                  |
| lens                     | Polycarbonate              |


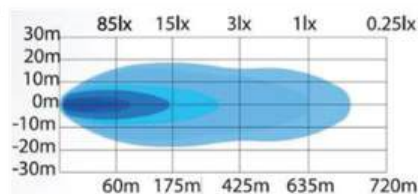





**PAPILDOMAS LED ŽIBINTAS SKYLED TOWER 31,2 LED BAR (789 MM) WITH WHITE/ORANGE DYNAMIC POSITION LIGHTS PN. 130.312LBDT**

**LED BAR SKYLED TOWERE 31,2": 130.312LBD**

**120,00Eur+PVM**

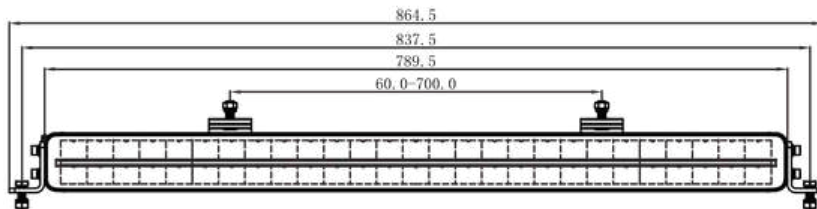

|                          |                                |
|--------------------------|--------------------------------|
| Type of lamp             | LED BAR                        |
| Power of light           | ECE 22680 Lm, 20250Lm          |
| 1 LUX @ m                | 780m (1 lux) ECE               |
| IP-class                 | IP67, IP69K                    |
| Position light (Dynamic) | White and Orange (Dynamic)     |
| Voltage (V DC)           | 10-32V                         |
| Color Temperature        | 5700K                          |
| LED                      | 54 LED x 5W                    |
| Width                    | 789,5 mm                       |
| Depth                    | 70,1 mm                        |
| Height                   | 63,8 mm                        |
| According to Regulation  | ECE R10, R148, R149 Ref. No 50 |
| Material housing/chassi  | Aluminium                      |
| Material lens            | Polycarbonate                  |


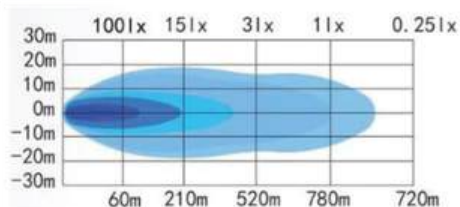




**ARIES PAPILDOMAS LED ŽIBINTAS 12/24V  
+ FRAME, 196 MM PN. SKL154-011**

**ARIES LED BAR 6" 12/24V + FRAME: SKL154-011**

|                           |                              |
|---------------------------|------------------------------|
| Type of lamp              | LED BAR                      |
| Power of light            | ECE 2000 Lm (Effective)      |
| IP-class                  | IP67                         |
| 1 LUX @ m                 | 205 m (1 lux)                |
| Position light            | -                            |
| Voltage (V DC)            | 12-3 6V                      |
| LED power                 | 3 LED x 12W                  |
| Width                     | 158 mm<br>(196,1 with frame) |
| Depth                     | 92,1 mm                      |
| Height                    | 58 mm (74 mm z ramką)        |
| Height with bracket       | 73,5 mm                      |
| According to regulation   | ECE R112 R10, (REF. 12,5)    |
| Material housing /chas si | Aluminium                    |
| Connector                 | DT2                          |
| Material lens             | Polycarbonate                |

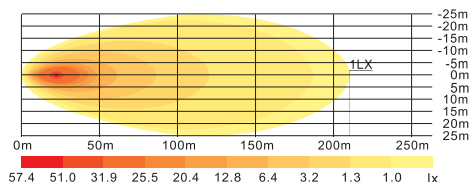
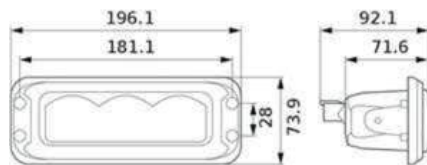




**ARIES PAPILDOMAS LED ŽIBINTAS 12/24V, 342 MM,  
WHITE POSITION LIGHT PN. SKL154-001**

**ARIES LED BAR 12": SKL154-001**

|                         |                                |
|-------------------------|--------------------------------|
| Typ of lamp             | LED BAR                        |
| Power of light          | ECE 3000 Lm (Effective)        |
| IP-class                | IP67                           |
| 1 LUX @ m               | 381 m (1 lux)                  |
| Position light          | White                          |
| Voltage (V DC)          | 12-4 8V                        |
| LED power               | 6 LED x 12W                    |
| Width                   | 311,3 mm                       |
| Depth                   | 72,5 mm                        |
| Height                  | 57,1 mm                        |
| Height with bracket     | 82,6 mm                        |
| According to regulation | ECE R112, R7, R10<br>(REF. 30) |
| Material housing/chassi | Aluminium                      |
| Connector               | DT3                            |
| Material lens           | Polycarbonate                  |

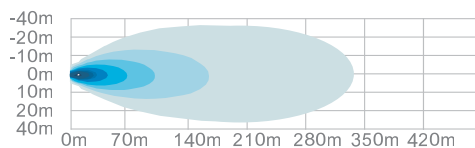
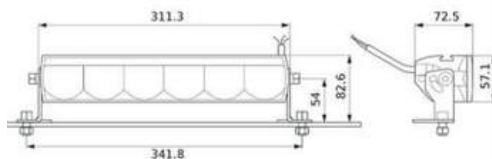




**SKYLED ARIES PAPILDOMAS LED ŽIBINTAS 12/24V, 522 MM**  
**WHITE POSITION LIGHT PN. SKL154-021**

**SKYLED ARIES LED BAR 20": SKL154-021**

|                           |                              |
|---------------------------|------------------------------|
| Type of lamp              | LED BAR                      |
| Power of light            | ECE 5000 Lm (Effective)      |
| IP-class                  | IP67                         |
| 1 LUX @ m                 | 452 m (1 lux)                |
| Position light            | White                        |
| Voltage (V DC)            | 12-4 8V                      |
| LED power                 | 10 LED x 12W                 |
| Width                     | 521,8 mm                     |
| Depth                     | 72,4 mm                      |
| Height                    | 57,1 mm                      |
| Height with bracket       | 82,6 mm                      |
| According to regulation   | ECE R112, R7, R10, (REF. 45) |
| Material housing /chas si | Aluminium                    |
| Connector                 | DT3                          |
| Material lens             | Polycarbonate                |

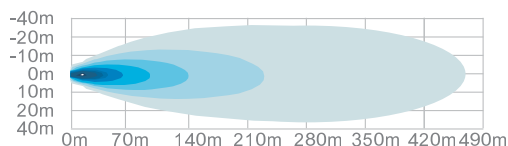




**DARBINIS ŽIBINTAS PAVO 80F, 12-30V, 80W, 4200 LM (PLATAUS KAMPO APŠVIETIMAS), SU GABARITINE ŠVIESA (BALTA, ORANŽINĖ, RAUDONA)**

**49,00Eur+PVM**

**PAVO 80F: 13SL50012**

|                         |                   |
|-------------------------|-------------------|
| Pavo                    |                   |
| Typ of lamp             | Work Lamp         |
| Light mode              | Flood             |
| Power of light          | 4200 LM           |
| IP-class                | IP67, IP69K       |
| Voltage (V DC)          | 10-4 8V           |
| LED power               | 80W (4 LED x 20W) |
| Light color             | 5700K             |
| Width                   | 121,8 mm          |
| Depth                   | 81,5 mm           |
| Height with bracket     | 139,4 mm          |
| According to regulation | ECE R10 RoHS      |

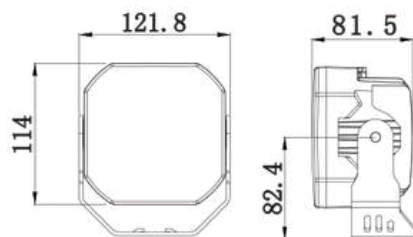




**DARBINIS ŽIBINTAS SKYLED IGNIS 15F 10-30V, 15W, 1560 LM  
(PLATAUS APŠVIETIMO) PN. 13SL50052**

### WORK LIGHT SKYLED IGNIS 15F: 13SL50052

|                         |                        |
|-------------------------|------------------------|
| Typ of lamp             | Work Light             |
| Typ of Beam             | Flood Beam             |
| Power of light          | 1560 Lm, 1186 Lm       |
| IP-class                | IP67, IP69K            |
| Voltage (V DC)          | 10-32V                 |
| LED                     | 15W (3 LED Osram x 5W) |
| Color Temperature       | 5700K                  |
| Width                   | 90 mm                  |
| Depth                   | 72 mm                  |
| Height with bracket     | 56 mm                  |
| According to Regulation | ECE R10/R148           |


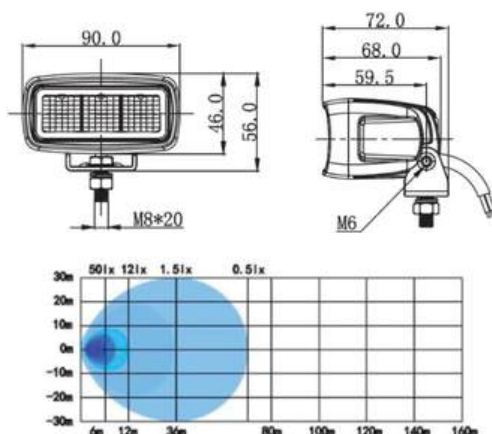




**DARBINIS ŽIBINTAS SKYLED IGNIS 30F 10-30V, 30W, 2520 LM (PLATAUS APŠVIETIMO) PN. 13SL50032**

**WORK LIGHT SKYLED IGNIS 30F: 13SL50032**

|                         |                        |
|-------------------------|------------------------|
| Typ of lamp             | Work Light             |
| Typ of Beam             | Flood Beam             |
| Power of light          | 2520 Lm, 2259 Lm       |
| IP-class                | IP67, IP69K            |
| Voltage (V DC)          | 10-32V                 |
| LED                     | 30W (6 LED Osram x 5W) |
| Color Temperature       | 5700K                  |
| Width                   | 160 mm                 |
| Depth                   | 64 mm                  |
| Height with bracket     | 54 mm                  |
| According to Regulation | ECE R10, R148          |

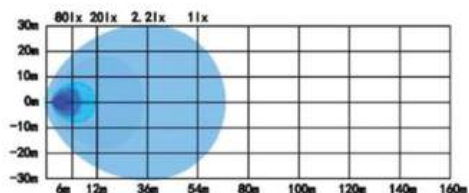





**DARBINIS ŽIBINTAS SKYLED IGNIS 30S 10-30V, 30W, 2520 LM  
(TAŠKINIS, APŠVIETIMAS) PN. 13SL50042**

**WORK LIGHT SKYLED IGNIS 30S: 13SL50042**

|                         |                               |
|-------------------------|-------------------------------|
| Typ of lamp             | Work Light                    |
| Typ of Beam             | Spot Beam                     |
| Power of light          | 2520 Lm, 2259 Lm              |
| IP-class                | IP67, IP69K                   |
| Voltage (V DC)          | 10-32V                        |
| LED                     | 30W (6 LED Osram x 5W)        |
| Color Temperature       | 5700K                         |
| Width                   | 160 mm                        |
| Depth                   | 64 mm                         |
| Height with bracket     | 54 mm                         |
| According to Regulation | ECE R10, R149 (Ref. No. 17,5) |

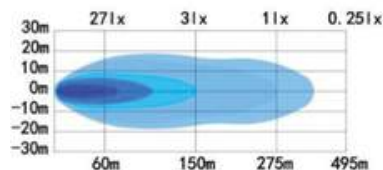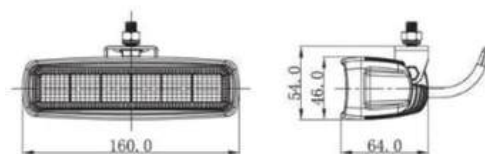




**DARBINI ŽIBINTAS**  
**SKYLED IMNIS 30F 10-30V, 30W, 2520 LM (PLATUS SPINDULYS) PN.**  
**13SL50072**

**WORK LIGHT SKYLED AMNIS 30F: 13SL50072**

|                         |                        |
|-------------------------|------------------------|
| Typ of lamp             | Work Light             |
| Typ of Beam             | Flood Beam             |
| Power of light          | 2520 Lm, 2400 Lm       |
| IP-class                | IP67, IP69K            |
| Voltage (V DC)          | 10-32V                 |
| LED                     | 30W (6 LED Osram x 5W) |
| Color Temperature       | 5700K                  |
| Width                   | 85 mm                  |
| Depth                   | 62 mm                  |
| Height with bracket     | 74 mm                  |
| Wiring                  | DT2                    |
| According to Regulation | ECE R10                |


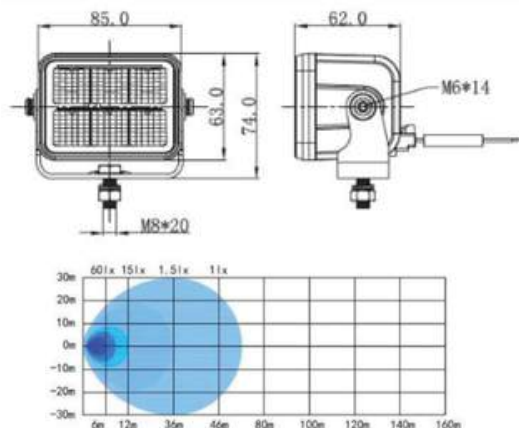




**DARBINIS ŽIBINTAS SKYLED IMNIS 45F 10-30V, 45W, 3780 LM (PLATUS SPINDULYS) PN. 13SL50112**

### WORK LIGHT SKYLED AMNIS 45F: 13SL50112

|                         |                        |
|-------------------------|------------------------|
| Type of lamp            | Work Light             |
| Type of Beam            | Flood Beam             |
| Power of light          | 3780 Lm, 3650 Lm       |
| IP-class                | IP67, IP69K            |
| Voltage (V DC)          | 10-32V                 |
| LED                     | 45W (9 LED Osram x 5W) |
| Color Temperature       | 5700K                  |
| Width                   | 85 mm                  |
| Depth                   | 62 mm                  |
| Height with bracket     | 96 mm                  |
| Wiring                  | DT2                    |
| According to Regulation | ECE R10                |


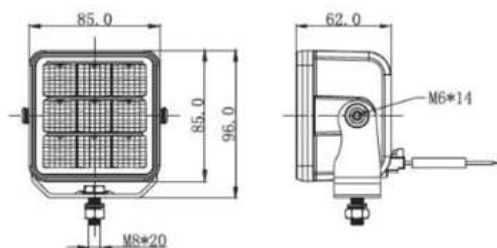
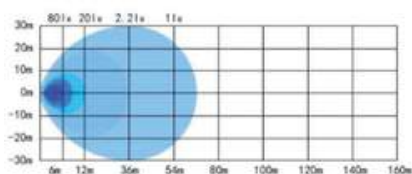




**DARBINIS ŽIBINTAS SKYLED IMNIS 45S 10-30V, 45W, 3780 LM  
(TAŠKINIS SPINDULYS ) PN. 13SL50122**

**WORK LIGHT SKYLED AMNIS 45S: 13SL50122**

|                         |                             |
|-------------------------|-----------------------------|
| Typ of lamp             | Work Light                  |
| Typ of Beam             | Spot Beam                   |
| Power of light          | 3780 Lm, 3650 Lm            |
| IP-class                | IP67, IP69K                 |
| Voltage (V DC)          | 10-32V                      |
| LED                     | 45W (9 LED Osram x 5W)      |
| Color Temperature       | 5700K                       |
| Width                   | 85 mm                       |
| Depth                   | 62 mm                       |
| Height with bracket     | 96 mm                       |
| Wiring                  | DT2                         |
| According to Regulation | ECE R10, R149 (Ref. No. 25) |



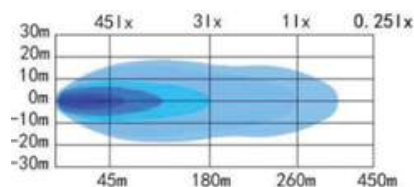




**DARBINIS ŽIBINTAS IMNIS 60F 10-30V, 60W, 5040 LM (PLATUS SPINDULYS) PN. 13SL50092**

**WORK LIGHT SKYLED AMNIS 60F: 13SL50092**

|                         |                         |
|-------------------------|-------------------------|
| Type of lamp            | Work Light              |
| Type of Beam            | Flood Beam              |
| Power of light          | 5040 lm, 3930 lm        |
| IP-class                | IP67, IP69K             |
| Voltage (V DC)          | 10-32V                  |
| LED                     | 60W (12 LED Osram x 5W) |
| Color Temperature       | 5700K                   |
| Width                   | 152 mm                  |
| Depth                   | 62 mm                   |
| Height with bracket     | 74 mm                   |
| Wiring                  | DT2                     |
| According to Regulation | ECE R10                 |

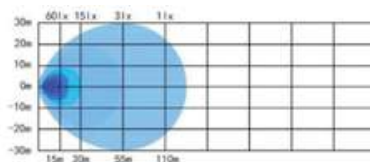




**ŠVYTURĖLIS SKYLED (89 MM) 3 VARŽTŲ TVIRTINIMAS, SKAIDRUS GAUBTAS, ORANŽINIS LED**

**LED BEACON SKYLED: 13SL10013C**

|                         |                     |
|-------------------------|---------------------|
| Type of lamp            | LED Beacon          |
| Type of montage         | 3 bolts             |
| PCS LED's               | 12                  |
| IP-class                | IP67                |
| Voltage (V DC)          | 10-30V              |
| Patterns                | 10                  |
| Weight                  | 575 g               |
| Diameter                | 167 mm              |
| Height                  | 89 mm               |
| According to regulation | R10,R65,SAE CLASS 1 |

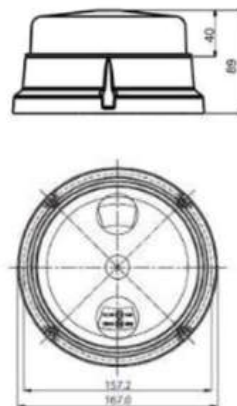




**ŠVYTURĖLIS SKYLED (89 MM) 3 VARŽTŲ TVIRTINIMAS, ORANŽINIS GAUBTAS, LED**

**LED BEACON SKYLED: 13SL10013A**

|                         |                     |
|-------------------------|---------------------|
| Type of lamp            | LED Beacon          |
| Type of montage         | 3 bolts             |
| PCS LED's               | 12                  |
| IP-class                | IP67                |
| Voltage (V DC)          | 10-30V              |
| Patterns                | 10                  |
| Weight                  | 575 g               |
| Diameter                | 16 / mm             |
| Height                  | 89 mm               |
| According to regulation | R10,R65,SAE CLASS 1 |

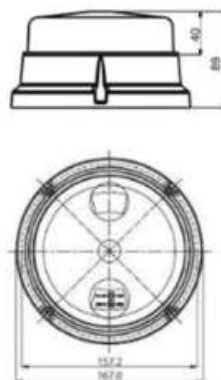




ŠVYTURĖLIS SKYLED (132 MM) 3 varžtų tvirtinimas, skaidrus gaubtas, oranžinis LED

**LED BEACON SKYLED: 13SL10030C**

|                         |                    |
|-------------------------|--------------------|
| Typ of lamp             | LED Beacon         |
| Typ of montage          | 3 bolts            |
| PCS LED's               | 36                 |
| IP-class                | IP67               |
| Voltage (V DC)          | 10-30V             |
| Patterns                | 4                  |
| Weight                  | 1,34 kg            |
| Diameter                | 167 mm             |
| Height                  | 132 mm R10,R65,SAE |
| According to regulation | CLASS 1            |






## ŠVYTURĖLIS SKYLED (132 MM) 3 VARŽTŲ TVIRTINIMAS ORANŽINIS LED

### LED BEACON SKYLED: 13SL10030A

|                         |                    |
|-------------------------|--------------------|
| Typ of lamp             | LED Beacon         |
| Typ of montage          | 3 bolts            |
| PCS LED's               | 36                 |
| IP-class                | IP67               |
| Voltage (V DC)          | 10-30V             |
| Patterns                | 4                  |
| Weight                  | 1,34 kg            |
| Diameter                | 167 mm             |
| Height                  | 132 mm R10,R65,SAE |
| According to regulation | CLASS 1            |






**MIRKSINTIS ŽIBINTAS SKYLED (142 MM), ORANŽINĖ LED ŠVIESA, IP65**

**FLASH LIGHT SKYLED: 13SL12003**

|                         |              |
|-------------------------|--------------|
| Typ of lamp             | Flash Light  |
| PCS LED's               | 6            |
| IP-class                | IP67         |
| Voltage (V DC)          | 10-30V       |
| Patterns                | 10           |
| Width                   | 142 mm       |
| Height                  | 30 mm        |
| Depth                   | 35 mm        |
| According to regulation | R10,R65,IP67 |





**GALINIS ŽIBINTAS SKYLED (GALINIS /  
ATBULINĖS EIGOS / GALINIS RŪKO)**

**TAIL LIGHT SKYLED: 13SL40210**

|                         |                       |
|-------------------------|-----------------------|
| Typ of lamp             | Tail light            |
| Function                | Tail/Reverse/Rear Fog |
| IP-class                | IP67                  |
| Voltage (V DC)          | 12-24V                |
| Diameter                | 140 mm                |
| Depth                   | 83/33 mm              |
| Wiring                  | 300 mm                |
| According to regulation | ECE R7/R23/R38/R10    |






**GALINIS ŽIBINTAS SKYLED (GALINIS /  
STABDŽIŲ / POSŪKIO SIGNALAS)**

**17,00Eur+PVM**

**TAIL LIGHT SKYLED: 13SL40200**

|                         |                     |
|-------------------------|---------------------|
| Type of lamp            | Tail light          |
| Function                | Tail/Spot/Indicator |
| IP-class                | IP67                |
| Voltage (V DC)          | 12-24V              |
| Diameter                | 140 mm              |
| Depth                   | 83/33 mm            |
| Wiring                  | 300 mm              |
| According to regulation | ECE R148/R10        |

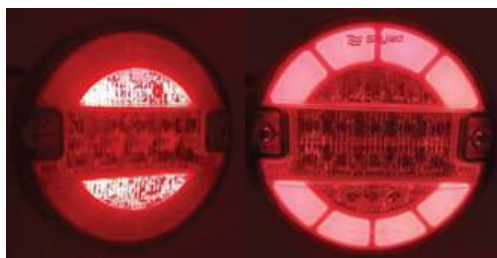



**GALINIS ŽIBINTAS SKYLED (GALINIS /  
ATBULINĖS EIGOS / GALINIS RŪKO)**

**TAIL LIGHT SKYLED: 13SL40330**

|                         |                  |
|-------------------------|------------------|
| Typ of lamp             | Tail light       |
| Function                | Reverse/Rear Fog |
| IP-class                | IP67             |
| Voltage (V DC)          | 12-24V           |
| Diameter                | 155 mm           |
| Depth                   | 43 mm            |
| Wiring                  | 2500 mm          |
| According to regulation | ECE R23/R38/R10  |



**GALINIS ŽIBINTAS SKYLED (GALINIS /  
ATBULINĖS EIGOS / GALINIS RŪKO)**

**TAIL LIGHT SKYLED: 13SL40300**

|                         |                     |
|-------------------------|---------------------|
| Typ of lamp             | Tail light          |
| Function                | TAIL/SPOT/INDICATOR |
| IP-class                | IP67                |
| Voltage (V DC)          | 12-24V              |
| Diameter                | 155 mm              |
| Depth                   | 43 mm               |
| Wiring                  | 2500 mm             |
| According to regulation | ECE R6/R7/R10       |



 **Skyled**

[WWW.ENATRUCK.LT](http://WWW.ENATRUCK.LT)